

NXA4-80

DIGITAL AUDIO MANAGERS

Powered Digital Audio Manager



PRODUCT OVERVIEW

NXA4-80 is a 4 channel self-powered digital manager that stays halfway between a digital matrix and a multichannel amplifier. An "all-in-one" digital audio device that becomes a complete audio solution, including several remote control options and a long list of smart features.

KEY FEATURES

- 4 analogue audio inputs x 4 powered audio outputs
- Class D amplifiers (eco friendly)
- Auto stand-by function (eco friendly)
- 100% silent (fanless convection cooling system)
- Health self-test mode function, with FAULT RELAY (for an external redundancy system)
- Integrated anti-clip system
- Integrated DSP processor. Main features:
 - Inputs mixer independent per channel (all inputs available)
 - VOLUME, MUTE, SOLO, PHASE INVERSION, MAX. VOL limit and MIN.VOL limit, LP and HP Crossover filters, parametric EQ filters bank, Ducker, Delay, Compressor and more settings configurable per channel.
 - Ethernet interface, compatible with EclerNet Manager platform and UCP remote control system
 - TP-NET third-party remote control (compatible with CRESTRON®, AMX®, RTI®, VITY®, etc.)


APPLICATIONS

- Live sound
- Centralized, distributed or hybrid fixed installation
- Integration in installation global control systems
- Big Public Address zoned systems
- Installations requiring remote supervision, diagnostic and adjustment via Internet

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

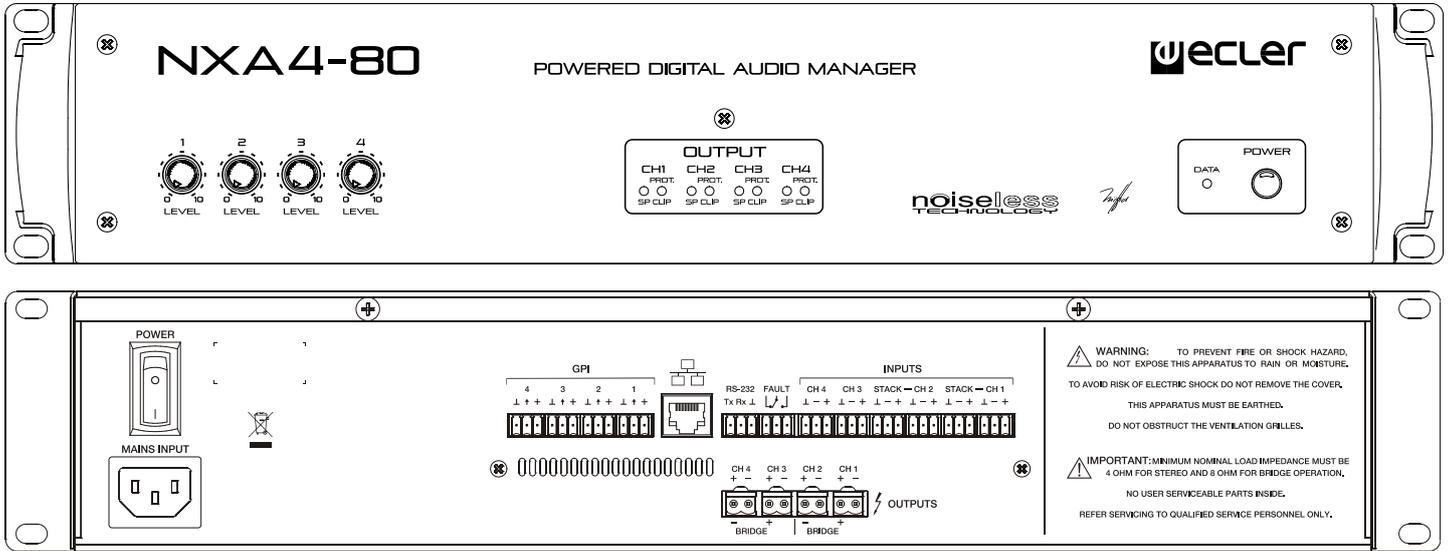

TECHNICAL DATA

Power 20Hz-20kHz 1% THD	
1 Channel @ 4Ω	85 WRMS
1 Channel @ 8Ω	51 WRMS
All Channels @ 4Ω	66 WRMS
All Channels @ 8Ω	43 WRMS
1 Bridge channel @ 8Ω	160 WRMS
Overall Voltage Gain	+26 / +32 dB
Frequency response (-1dB, -3dB)	10Hz – 25kHz
THD + Noise @ 1kHz Full power	<0.05%
Noise Floor (FFT) 20Hz – 20KHz	>100dB (110dB typ.)
Damping factor 1kHz @ 8Ω	>150
Channel Crosstalk @ 1kHz	>75dB
Input connectors	Terminal block (Symmetrical)
Input CMRR/ref. Max. PWR	>50dB
Signal present indicator	Lit at -40dBV
Output connectors	Terminal block
Anticlip limiter	Soft / Mid / Hard
Volume remote control	(0-10VDC) (0.1A max.) 0V = no attenuation / +10V = full attenuation
Remote control connectors	Terminal block
Mains	Depending on your country. See characteristics in the back of the unit.
Power consumption	
(pink noise, 1/8 power @ 4ohm)	107VA
(pink noise, 1/3 power @ 4ohm)	208VA
Stand-by mains consumption	<3W
Panel Dimensions	482.6x88mm
Depth (Handles and knobs excluded)	373mm
Weight	8.6kg
Processing	
A/D & D/A	24 bit, 48kHz. 115dB AKM Codec
DSP	32/64 bits
Latency	2ms
Analog Input headroom	+18 dBV = +21dBu
Digital Input attenuator	Stepless from -∞ to +0dB
Input Impedance	Balanced, 22kΩ
Maximum Delay	1s (343.4m) for each channel
Delay resolution	20.8μs (6mm)

Compressor / Limiter	
Threshold	from -36dBV to +18dBV
Ratio	1:1 to ∞:1 (limiter)
Attack time	Auto or from 0.1ms to 500ms.
Release time	Auto or from 1ms to 5s.
Output peak voltage limiter	
Peak voltage upon model (auto settings)	From 10Vpk to 70Vpk
High & Low pass Crossover filters	Butterworth in 6/12/18/24dB/oct.
	Bessel in 12/18/24dB/oct.
	Linkwitz-Riley in 12/24dB/oct.
Parametric Eq types (8 max. per output)	Bypass / On-Off all channels
	Param. Eq. 20Hz-20kHz; -60/+12dB; Q from 0.3 to 200
	Low & High Shelf 6/12 dB/oct
	Low & High Pass 6/12 dB/oct.
	All-Pass 1/2 order
Built In signal generator	Sine (20Hz to 20kHz)
	Polarity (10/20Hz to 10/20kHz)
	White
	Pink
Signal Mute	Yes
Signal Polarity Invert	Yes
Connectivity	Ethernet Base-Tx 10/100Mb, Auto X-Over, Cat5
	RS232 57600 (fixed)-8-N-1-N
Software	
EclerNet Software	Realtime full GUI of all functions and controls through Ethernet with interactive graphical display
	Grouping mode channels or devices
	Automated report generation
	Remote power on with programmable delay.
	Up to 256 devices on same net.
	Autodiscovery devices feature
	Routing capability through NAT gateways.
	Real time metering at input/output (DSP)
	Device "Finder" feature
	Save & Recall setup and preset functions
	Firmware update capability thru Ethernet
	Password protection
	Default Network configuration:
	IP: 192.168.0.100
Mask: 255.255.255.0	
Gate: 192.168.0.1	
UDP Port: 2210	
Operating System	Windows® 10; W8.1; W8; W7; Vista (SP1); XP Prof. (SP3); W2000 Prof. (SP4)
Minimum EclerNet System Requirements	Pentium IV® 2GHz
	500MB RAM
	100MB HDD free space
	1024x768 pixels & 16bits color display
	10/100/1000 Ethernet Network card