




APPLICATIONS

- Shopping centres
- Retail shops
- PA distributed sound systems
- Clubs, Cafes, Bars foreground/background reinforcement
- Health and sports centres
- Meeting and conference rooms

eCS403/eCS803 is a column loudspeaker, featuring 70/100V transformer with 4 different power taps. Aluminium enclosure with included wall bracket and IP44 class.

eUC106 is a spherical pendant loudspeaker featuring a 6,5" woofer, 1" tweeter and 70/100V transformer.

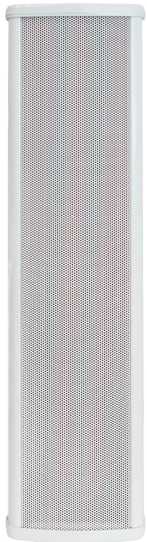

eCS403



eCS803



eUC106



eUC106



KEY FEATURES

eCS403 / eCS803:

- Column type loudspeaker
- Transformer selector: low/high impedance
- Stripped wire connection
- Aluminium enclosure
- IP44 rated
- Included wall bracket

eUC106:

- Spherical pendant type loudspeaker
- 8 Ω and 70/100 V (40W RMS)
- 6,5" woofer + 1" tweeter
- Transformer selector: 32W-16W-8W-4W 100V / 16W-8W-4W-2W 70V - 8Ω
- Stripped wire connection (3m)
- Available in white and black finish
- EASE Win file available

	eCS403	eCS803	eUC106
RMS power / Program power (8Ω)	40W / 80W (4Ω)	80W / 160W	40W / 80W
Woofer / tweeter	4x3" / -	8x3" / -	6,5" / 1"
Power selector @ 100V	2,5/5/10/20 W	5/10/20/30 W	4/8/16/32 W
SPL 1W/1m	92 dB	94 dB	89 dB
Dimensions / Weight	HxWxD: 460x105x90mm / 2,5 kg.	HxWxD: 760x105x90mm / 4,5 kg.	øxH: 270x215mm / 3,0 kg.